

### Safety First

When using solvents and adhesives, follow appropriate safety precautions. These include personal protection equipment (gloves & protective eye wear) and adequate ventilation. Refer to SDS for complete information. Read all instructions before starting work.

### Step 1 Prepare Substrate

#### Clean

Clean substrate to remove all surface contaminants:

- Use a clean, lint-free cloth and fresh cleaning solvent (CB911 or acetone is recommended). Saturate cloth with solvent and wipe substrate with a single rolling motion.
- Check cloth for residue. If present, fold cloth over to use a clean side, or use a fresh clean cloth and repeat wipe.

**Tip:** Always use clean side of cloth for each wipe. Never use same side more than once.

- If necessary, use clean dry cloth to remove any solvent left on substrate.

Wipe using a single rolling motion.



#### Abrade


Abrade substrate where part is to be installed:

- Use appropriate abrasive, and method. (Metallic 120-180 grit, Composite 160-180 grit)

**Caution:** If installing on composite substrate, do not damage fibers during abrading.

- Remove surface oxides, top coat, and primer to expose bare material.

**Tip:** Use random motion to abrade substrate.

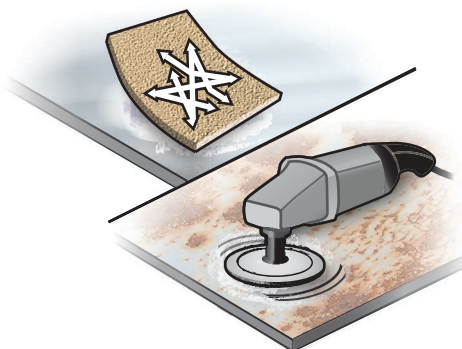

#### Clean

Repeat cleaning process to remove abrasion residue:

- Solvent wipe the substrate with a single rolling motion.

**Tip:** Solvent clean progressively smaller areas to avoid introducing contamination.

- Check cloth for residue. If present, fold cloth over to use a clean side, or use a fresh clean cloth and repeat wipe.

**Tip:** Always use clean side of cloth for each wipe. Never use same side more than once.

- If necessary, use clean dry cloth to remove any solvent left on substrate.


Wipe using a single rolling motion.



### Step 2 Prepare Part


- Solvent wipe base of part with single circular motion.
- Remove backing tab from fixture in center of part.
- Apply adhesive to part base as shown.

**Tip:** Use enough adhesive to provide a small, uniform amount of squeeze-out when part is installed. Keep foam tape clear of adhesive.

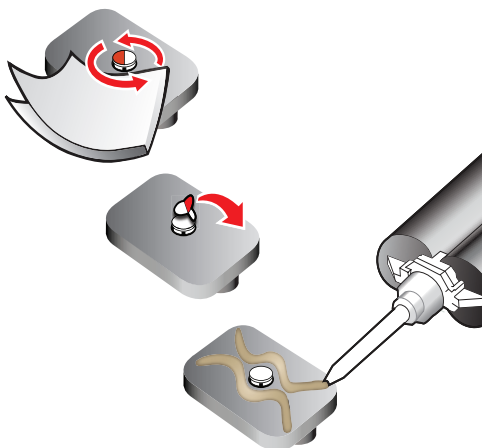

### Step 3 Locate & Bond

- Position and align part.
- Press lightly on part as shown to adhere foam tape to substrate.
- Press a little more on part to seat fixture to substrate. Remove pressure once the part is seated.
- Make sure adhesive squeeze out is visible all the way around base of part.

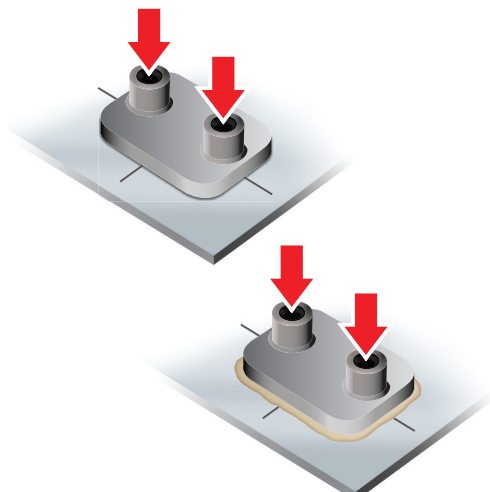

### Step 4 Cure & Complete

- Allow adhesive to cure. Do not wipe away adhesive squeeze out. Do not disturb part during cure. Refer to appropriate adhesive data sheet for cure times.
- Installation is complete. If necessary, touch up coatings.

