





**ADHESIVE - BONDED
FASTENER TECHNOLOGY**

CB4598 Gimbaled Stud




**Enables Easy Alignment
Across a Curvature**


- 30° angular spherical rotation allows for placement on curved surfaces
- Capable of 400-pound+ load*
- Allows customization from a common base
- Reduces design complexity of structure
- Eliminates through-holes
- Reduces installation cost
- Facilitates equipment mounting/adjustment

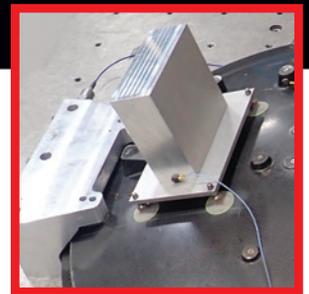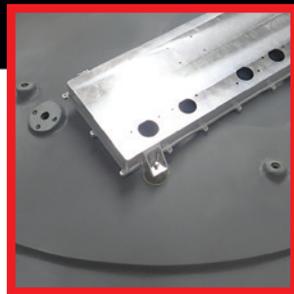

30°
With Max Angular
Spherical Rotation

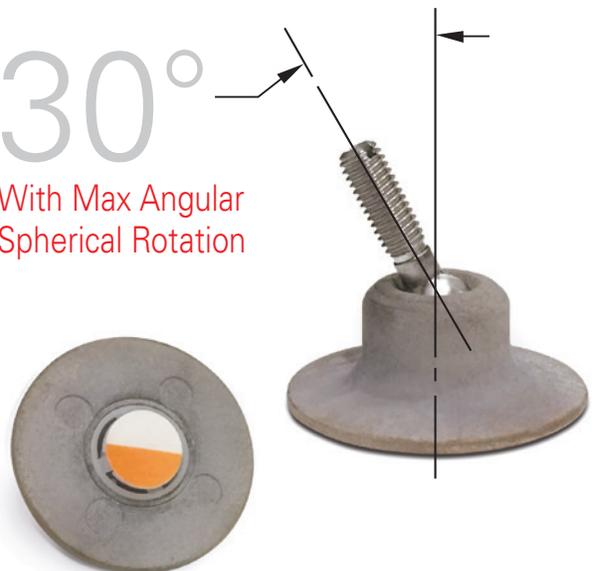

CB4598 Gimbaled Stud | Technical Specifications

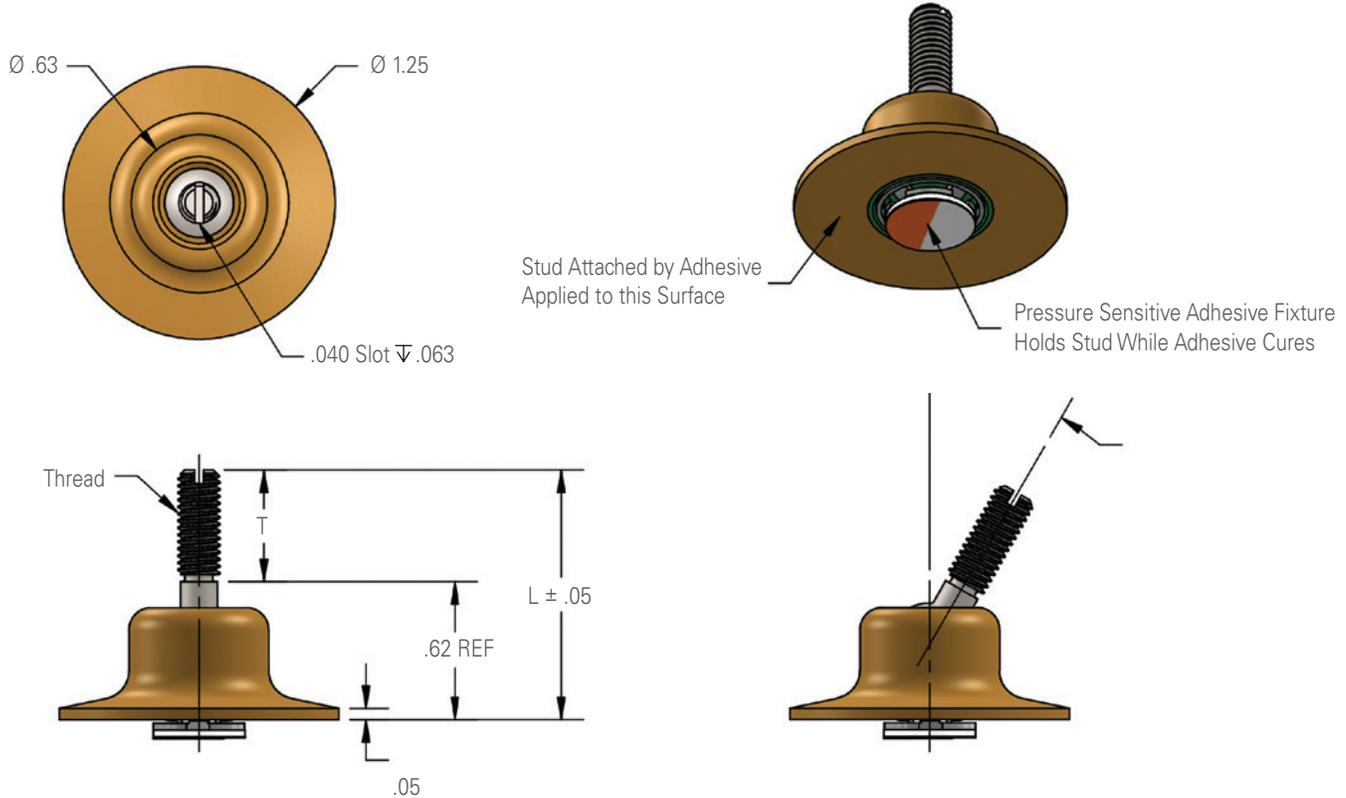

Example Part Number

CB4598 V 3 CR 8



Thread Size & Length Options

Thread Size		(L) Lengths			
Code	Size	Code	8	12	16
3	.1900-32 UNJF-3A	T	.50	.75	1.00
		L	1.13	1.38	1.63

Material & Finish Options

Baseplate Material		
Code	Material	Spec
V	40% GLASS PEI (ULTEM 2400 OR EQUAL)	CBMS-101

Stud Material and Finish Data			
Code	Material	Spec	Passivate
CR	302, 303, OR 304 CRES	AMS 5513, 5516, 5636, 5637, 5638, 5639, 5640, 5641, OR 5647	AMS 2700

* NOTE: Load performance is based on substrate the product is bonded to, proper surface preparation, use of recommend adhesive, and properly following all installation instructions.



2151 Lockheed Way
Carson City, NV 89706
+1.775.885.8000

WWW.CLICKBOND.COM

©2022 Click Bond, Inc. All rights reserved. Click Bond and the stylized logo are trademarks or registered trademarks, of Click Bond, Inc. Registered, U.S. Patent and Trademark Office.

CB7200271-B

